

ROPE TRICK

DESIGN BY STEFAN DIEZ



With its high-quality and progressive design, Rope Trick has been selected for inclusion in MoMA's permanent collection of design objects. Its innovative construction integrates LED technology within a dynamic new tailored form, and is made from a range of modern materials, including an internal plastic skeleton and woven PET for the light's arm, molded ABS for the base, and a specially designed aluminium LED module for dissipating heat.

The acrylic shade can slide along the neck of the light in a flexible way. This allows diffused light to be directed to different places in a room, producing a range of effects from a low-level ambient light to full brightness. The dimmer with memory adds to the sense that this design is at the vanguard of lighting technology.

PRODUCT DETAILS

- / Part of a progressive and technologically advanced lighting collection.
- / A contemporary floor lamp archetype with an innovative means of adjustment.
- / CE approved.
- / Integrating both up and down light functionality.
- / Integrated LED module included with an estimated life span of 25.000 hours of use.
- / Stepless touch dimmer.
- / Suitable for both private and office environments.
- / Qualified for contract use.
- / For indoor use only.

HAY

MATERIAL

LAMP BODY / Woven PET, steel, aluminium, polypropylene.

LAMP SHADE / Polypropylene.

LAMP BASE / ABS cover, internal cast iron counter weight.

CORD / Silicone.

COLOUR & FINISH

Please note that the colour codes are indicative.

Available in 3 different colours (rope only).

- / Black
- / Yellow
- / Beige

Base and shade (all variants)

- / Dark grey (RAL 7016)


Note that fixings, the heatsink, handle as well as the cord are black for all colour options.

DIMENSIONS

HEIGHT / 170 cm / 66.9"

LENGTH / 33 cm / 13"

WIDTH / 18 cm / 7.09"



SHADE / BASE



DARK GREY

ROPE



BLACK



YELLOW



BEIGE

TECHNICAL SPECIFICATIONS

- / LIGHT SOURCE / Integrated LED
- / POWER / 10W
- / DIMMABLE / Yes
- / POWER SUPPLY / 220-240V AC at 50-60Hz
UK/EU plug mounted adapter
- / CORD LENGTH / 250 cm
- / SWITCH / Stepless touch dimmer

TEST SPECIFICATIONS*

- / FLUX (lumens) / 410lm
- / CCT (kelvin) / 3000k, warm white
- / CRI (1-100) / 85

*Photometrics and the specification shown is taken using the integrated LED light source fitted in the production luminaire.

CERTIFICATIONS


CE approved: This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 55015:2013 (radio disturbance)
- / EN 61547:2009 (EMC immunity)
- / EN 61000-3-2:2014 (EMC compatibility)
- / EN 61000-3-3:2013 (EMC compatibility)
- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)
- / EN 62493:2010 (human exposure to EMC)

PHOTOMETRICS

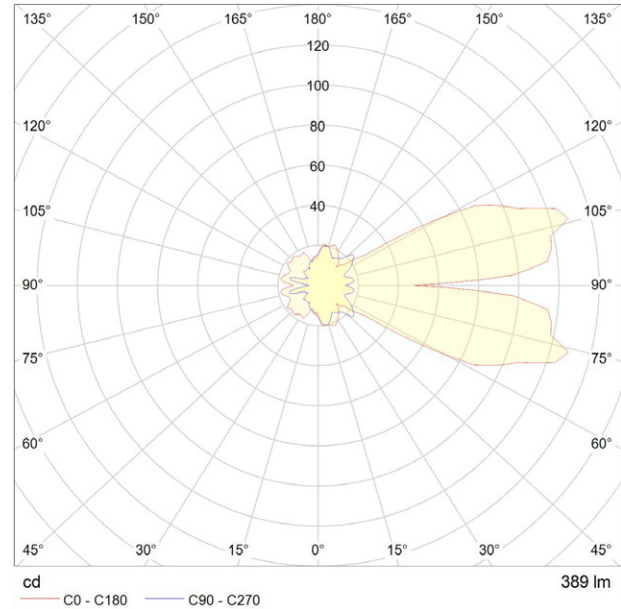

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance instructions, CE attestation of conformity certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[Link to downloads.](#)