


Designed by Bonderup & Thorup

PRODUCT



COLOURS

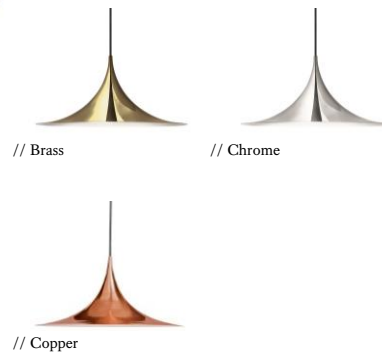

Item no.: 004-311XX
 + style code
 - 39: Brass
 - 40: Chrome
 - 46: Copper

DESCRIPTION

Semi is a unique pendant lamp, based on two quarter-circles put together, back-to-back. It's distinctive arch-shaped shade in lacquered, spun metal creates a diffused, cone-shaped light, ideal over a dining table or kitchen work surface.

VERSION - SEMI PENDANT Ø60 / SM3

Colour codes are indicative.


- Fabric wire - Black:
- Brass / White inside // Brass / RAL 9003 // Gloss level shiny / Gloss level 10
- Chrome / White inside // Chrome / RAL 9003 // Gloss level shiny / Gloss level 10
- Copper / White inside // Copper / RAL 9003 // Gloss level shiny / Gloss level 10

PENDANT VERSION

Order item - look for part number in the pricelist.

Series contains the following:

SM1, SM2, SM3



FACTS

MEASUREMENT - L X W X H MM

Lamp canopy height: 57 mm
 Lamp canopy diameter: 114 mm
 Shade height: 300 mm
 Shade diameter: Ø600mm
 Cable length, exposed: APP. 2200 mm
 Cable length, total: APP. 2500 mm

WEIGHT ITEM - LAMP INCL. WIRE AND CANOPY

2400 g

PACKAGING TYPE

Cardboard box

PACKAGING MEASUREMENT - L X W X H CM

L:64 X W:64 X H:33,5 cm

WEIGHT PACKAGING - MATERIAL TYPE (recyclable)

- Delivery note: 5 g
- PE-LD PolyEthylen, bottom and top plate: 150 g
- Socket protection: 11 g
- Brown paper post (2 pcs. Triangles and canopy box): 400 g
- PE polybag: 61 g
- Cardboard, outer white box w/5ply Corrugated: 2600 g
- Screws: 7 g

WEIGHT PACKAGING - TOTAL

3562 g

NUMBER OF PARCELS

1 pcs.

ACCESSORIES

SILVER CROWN REFLECTOR BULB / HALF MIRROR BULB:

Item no.: 004-99002 60W, E27 base - box of 10 pcs.

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE - CERTIFIED

INSTALLATION INSTRUCTIONS

Instructions document: No. 52-20-001-01

Bulb requirements:

- Socket: E27
- Recommended light source: Silver crown reflector bulb / Half Mirror bulb
- Recommended wattage: 60 W
- Max. Incandescent wattage: Max. 60 W

**Semi is on delivery supplied with 1 silver crown reflector bulb.*

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated




CE-Mark




Luminaires accepted for mounting on a flammable base


Step 6

12 Attach the canopy by screwing it on the ceiling bracket.






Semi



Step 7

13 Place light bulb in lamp and turn the power on.



BULB REPLACEMENT

- Disconnect the power before replacing bulb.

TROUBLESHOOTING

- If lamp does not light, turn off the power. Check the bulb for a broken filament. Replace bulb if necessary, then turn it on.
- If the lamp still does not light, please contact customer service at the local dealer.
- If the external flexible cable or cord of this lamp is damaged, it must be replaced by a qualified electrician in order to avoid a hazard.

GUBI A/S

KVLØRVEJ 7-9 / PÅRHUS 53 T. +45 3332 8388
 2150 Nordhavn, Copenhagen CVR. 17342354
 Denmark WWW.GUBI.DK

Technical information:

Lamp material: Silver crown reflector bulb/half mirror bulb. Semi diameter Ø1, H14 max. 420V / diameter 47 and Ø1, E27, max. 60W

Replacement of when changing light bulb

Insulation class I

The lamp is not approved for outdoor use or use in damp/very damp rooms (IP20)

Some advice on choosing your Semi lamp

Always use Semi with a lamp with a warm white and a lot of red wavelength

Use only soft cloth for wiping and cleaning. Never scrape or abrade.

Do not use abrasive household cleaners.


Do not use acids or alkaline cleaning materials, glass cleaner or household ammonia.

Step 1

1 Put the cable through the lamp shade.

When mounting directly on the ceiling continue to step 2.


If mounting on top of a ceiling box continue to step 5.



Step 3

4 Find the desired length of cable and cut off the outer isolation.


5 Mount the cable in the cable clamp.



Step 2

2 Attach ceiling bracket with screws.

3 Put cable through canopy shade.




Step 4

6 Attach the canopy by screwing it on the ceiling bracket.

7 Connect lamp cable to the supply wires.

8 Place light bulb in lamp and turn the power on.




Step 5

9 Put cable through canopy shade, find the desired length of cable and cut off the outer isolation.

10 Connect lamp cable to the supply wires.

11 Attach ceiling bracket with screws.



52-20-001-01 Semi metal mounting map 01